


TECHNICAL DATA SHEET

Eurovent FLEX 3D

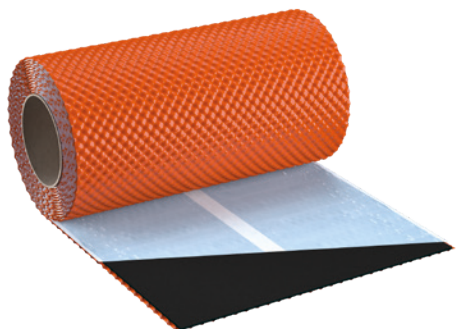

Self-adhesive aluminium chimney tape used for flashing around chimneys, dormers, and roof windows. Made of high-quality aluminium sheet profiled with a four-dimensional pattern and butyl adhesive. The product is highly flexible and easy to work with, making installation in hard-to-reach roof areas quick and simple.

PARAMETER	UNIT	VALUE
Material composition		Aluminium, butyl
Roll width	[mm]	300
Roll length	[mb]	5
Aluminium	[mm]	Width: 300 Thickness: 0.12
Butyl		Butyl tape dimensions: 290 x 1.0 mm Butyl tape colour: Black Butyl tape density: 1.65 ± 0.05 g/cm ³ Butyl tape peel resistance: > 25 (35 ± 10) N/24 mm Butyl tape solvents: none Butyl tape ageing resistance: good, also in warm and humid conditions
Colour	[RAL]	Brick red 8004, brown 8019, brown 8017, black 9005, anthracite 7021, chestnut 8015, cherry 3011, copper
Storage temperature	[°C]	from 5 to 25
Storage period	[month]	to 12
Carton	[pcs.]	1
Pallet	[pcs.]	144



TECHNICAL DATA SHEET

Eurovent **FLEX 3D**

Application: Used for all types of sealing and connections within the roof, particularly for chimney flashing, dormers, and roof windows. It is also applied when connecting roof surfaces with walls. Suitable for use on most roofing materials — ceramic and concrete tiles, metal roof tiles, trapezoidal sheets, and profiled aluminium sheets, etc.

Installation: For about 24 hours before application, the tape should be stored at room temperature (from 5 °C to 25 °C). The application temperature should be above 5 °C (recommended above 10 °C). The surface to which the tape is applied must be dry and free from dust and grease. Remove the protective liner, place the tape in the desired position, and press firmly.

Safety: The product is not intended for consumption. Avoid contact with eyes. In case of skin irritation, consult a doctor.

Storage / transport: The product should be stored in dry, covered areas, free from moisture and direct UV radiation. Under heavy load, the product may deform or become damaged. As the product is partly made of flexible aluminium sheet, it is recommended to store it in its original, sealed packaging. Stacking with other heavy items (both during transport and storage) is not advised. Transport should be carried out in covered vehicles, protected against damage. During transport, applicable transport safety regulations must be observed. The product must be protected from exposure to chemicals, especially solvent-based substances, as these may reduce its technical performance or cause permanent damage.

The product is covered by warranty provided that the guidelines specified in the technical data sheet are strictly followed. The manufacturer reserves the right to reject claims in cases of non-compliance with the given instructions.

Contained information, advice and guidance is given based on our knowledge, researches, experience and in good faith. We are not responsible for the consequences of improper or incorrect use of our products. Each user of this material will ensure in every possible way, including an examination of the final product in the relevant conditions, the suitability of supplied materials to achieve the objectives pursued by him.

Product information can be found on the website: www.eurovent.pl

Update date: 19/09/2025