


TECHNICAL DATA SHEET

Eurovent **FLEX STANDARD PB**

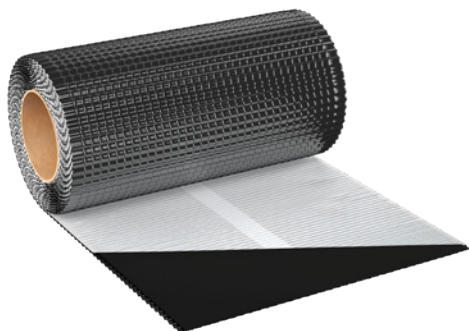

Self-adhesive lead chimney tape used for flashing around chimneys, dormers, and roof windows. It is also used for connections between roof surfaces and walls. Made of high-quality profiled lead sheet with a characteristic pattern and butyl adhesive.

| PARAMETER | UNIT | VALUE |
|----------------------|---------|---|
| Material composition | | Lead, butyl |
| Roll width | [mm] | 300 |
| Roll length | [mb] | 5 |
| Aluminium | [mm] | Width: 300 Thickness: 0,20 |
| Butyl | | Dimensions: 290 x 1.0 mm Colour: Black Density: 1.65 ± 0.05 g/cm ³ Peel resistance: > 25 (35 ± 10) N/24 mm Solvents: none Ageing resistance: good, also under warm and humid conditions |
| Colour | [RAL] | Brick red 8004, brown 8019, brown 8017, black 9005, anthracite 7021 |
| Storage temperature | [°C] | from 5 to 25 |
| Shelf life | [month] | to 12 |
| Carton | [pcs.] | 1 |
| Pallet | [pcs.] | 72 |



TECHNICAL DATA SHEET

Eurovent **FLEX STANDARD PB**

Application: Used for all types of sealing and connections on the roof, particularly for chimney, dormer, and roof window flashing. It is also applied for connections between roof surfaces and walls. Suitable for use on most types of roofing — ceramic and concrete tiles, metal roof tiles, trapezoidal sheets, profiled aluminium sheets, etc.

Installation: For approximately 24 hours before application, the tape should be stored at room temperature (from 5 °C to 25 °C). The application temperature should be above 5 °C (recommended above 10 °C). The surface to which the tape is applied must be dry and free from dust and grease. Remove the protective liner, place the tape in the desired position, and press firmly.

Safety: The product is not intended for consumption. Avoid contact with eyes. In case of skin irritation, consult a doctor.

Storage / transport: The product should be stored in dry, covered rooms, free from moisture and direct UV radiation. Under heavy load, the product may deform or become damaged. As it is partly made of flexible aluminium sheet, it is recommended to store it in its original, closed packaging. Stacking with other heavy products is not recommended (both during transport and storage). Transport should be carried out using covered vehicles, with the product secured against damage. During transport, applicable safety regulations must be observed. The product should be protected from chemical agents, especially solvent-based substances, as they may reduce its technical properties or cause permanent damage.

The product is covered by warranty provided that the guidelines specified in the technical data sheet are strictly observed. The manufacturer reserves the right to refuse warranty claims in case of non-compliance with these guidelines.

Contained information, advice and guidance is given based on our knowledge, researches, experience and in good faith. We are not responsible for the consequences of improper or incorrect use of our products. Each user of this material will ensure in every possible way, including an examination of the final product in the relevant conditions, the suitability of supplied materials to achieve the objectives pursued by him.

Product information can be found on the website: www.eurovent.pl

Update date: 26/01/2026