


## TECHNICAL DATA SHEET

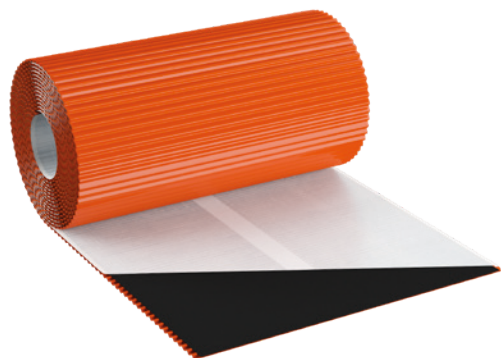

### Eurovent **FLEX STANDARD**

Self-adhesive aluminium chimney tape used for flashing around chimneys, dormers, and roof windows. It is also applied for connections between roof surfaces and walls. Made of high-quality cross-profiled aluminium sheet and butyl adhesive.

PARAMETER	UNIT	VALUE
Material composition		Aluminium, butyl
Roll width	[mm]	300
Roll length	[mb]	5
Aluminium	[mm]	Width: 300 Thickness: 0,12
Butyl		Dimensions: 290 x 1.0 mm Colour: Black Density: 1.65 ± 0.05 g/cm <sup>3</sup> Peel resistance: > 25 (35 ± 10) N/24 mm Solvents: none Temperature resistance: from -40 °C to +90 °C Ageing resistance: good, also under warm and humid conditions.
Colour	[RAL]	Brick red 8004, brown 8019, brown 8017, black 9005, anthracite 7021, chestnut 8015, cherry 3011
Storage temperature	[°C]	from 5 to 25
Shelf life	[month]	to 12
Carton	[pcs.]	1
Pallet	[pcs.]	144



## Eurovent FLEX STANDARD

**Application:** Used for all types of sealing and connections on the roof, particularly for chimney, dormer, and roof window flashing. It is also applied for connections between roof surfaces and walls. Suitable for use on most roofing types — ceramic and concrete tiles, metal roof tiles, trapezoidal sheets, profiled aluminium sheets, etc.

**Installation:** For about 24 hours before application, the tape should be stored at room temperature (from 5 °C to 25 °C). During application, the temperature should be above 5 °C (recommended above 10 °C). The surface to which the tape is applied must be dry and free of dust and grease. Remove the protective liner, place the tape in the desired position, and press firmly.

**Safety:** The product is not intended for consumption. Avoid contact with eyes. In case of skin irritation, consult a doctor.

**Storage / transport:** The rolls should be stored at room temperature in dry, covered rooms, free from moisture and direct UV radiation. Under heavy load, the rolls may deform or become damaged. As the product is partly made of flexible aluminium sheet, it is recommended to store it in its original, closed packaging. Stacking with other heavy products is not recommended (both during transport and storage). Transport should be carried out using covered vehicles, with the product secured against damage. During transport, applicable safety regulations must be observed. The rolls should be protected from chemical agents, especially solvent-based substances, as they may reduce its technical properties or cause permanent damage.

The product is covered by warranty provided that the guidelines specified in the technical data sheet are strictly observed. The manufacturer reserves the right to refuse warranty claims in case of non-compliance with these guidelines.

*Contained information, advice and guidance is given based on our knowledge, researches, experience and in good faith. We are not responsible for the consequences of improper or incorrect use of our products. Each user of this material will ensure in every possible way, including an examination of the final product in the relevant conditions, the suitability of supplied materials to achieve the objectives pursued by him.*

Product information can be found on the website: [www.eurovent.pl](http://www.eurovent.pl)

Update date: 26/01/2026