


TECHNICAL DATA SHEET

Eurovent **ROLL ECCO**

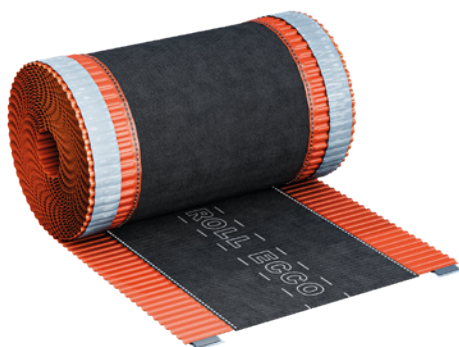

Ridge tape made of profiled aluminium sheet, PP nonwoven, and butyl tape. Used as a ventilation and sealing element, it protects the roof surface against moisture and dust while ensuring proper ventilation.

PARAMETER	UNIT	VALUE
Material		Aluminium, PP nonwoven, butyl
Roll width	[mm]	180; 240; 310; 390
Roll length	[mb]	5
Aluminium	[mm]	Width: 50; 70 Thickness: 0,12
PP nonwoven:		
- Width	[mm]	120,180,200
- Thickness	[mm]	ca. 0,50
- Components		100% Polypropylene
- Stabilisation		2% Stabilization HALS
- Concentration		20%
- Grammage	[g/m ²]	100
- Tensile strength	[N/cm]	208-215 N / 5 cm
- Elongation at break	ca.	75%
- Fibre thickness		2,2 - 2,6 den
Butyl tape:		
- Size:	[mm]	15 x 1,5
- Color:		Black
Storage temperature	[°C]	from 5 to 25
Shelf life	[month]	to 12
Cardboard	[pcs.]	180 mm, 310 mm - 5 390 mm - 4
Pallet	[pcs.]	180 mm - 240; 240 mm - 210; 310 mm - 180; 390 - 100



Eurovent **ROLL ECCO**

Application: It is used as a ventilation and sealing element on horizontal and sloped ridges. It protects the roof surface against wind-driven snow, rain, moisture, dust, and debris entering from the ridge area. Suitable for use under almost all types of roofing materials – ceramic tiles, concrete tiles, metal roof tiles, trapezoidal sheets, profiled aluminium sheets, and more.

Installation recommendations: Store the tape at room temperature (between 5 °C and 25 °C) for approximately 24 hours before application. The application temperature should be above 5 °C (recommended above 10 °C). The surface to which the tape is applied must be dry and free of dust and grease. The tape should be laid on the ridge batten, underneath the ridge tile. Before installation, clean and dry the surface thoroughly. Remove the protective liner from the butyl before use. Shape the pleated edges of the tape to match the profile of the roof tile.

Safety: The product is not intended for consumption. Avoid contact with eyes. In case of skin irritation, consult a doctor.

Storage / transport: The product should be stored at room temperature, in its original packaging, in dry, covered, and moisture-free indoor areas. The clips are made of aluminium sheet, which may deform under excessive weight. Therefore, it is recommended not to stack the product with other heavy items, either during transport or storage. The clips must be transported using covered vehicles, properly secured against damage. All applicable transport safety regulations must be observed during transportation. The product should be protected from exposure to chemicals that could reduce its technical performance or cause permanent damage.

The product is covered by a warranty provided that all guidelines specified in the technical data sheet are strictly followed. The manufacturer reserves the right to reject any claims resulting from failure to comply with these instructions.

Contained information, advice and guidance is given based on our knowledge, researches, experience and in good faith. We are not responsible for the consequences of improper or incorrect use of our products. Each user of this material will ensure in every possible way, including an examination of the final product in the relevant conditions, the suitability of supplied materials to achieve the objectives pursued by him.

Product information can be found on the website: www.eurovent.de

Update date: 16/07/2025