


TECHNICAL DATA SHEET

Eurovent **ROLL METAL NEW**

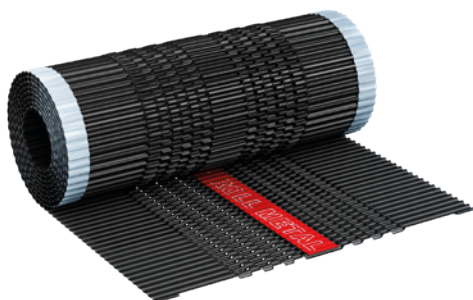

Single-layer ventilation tape for horizontal and sloped ridges. Made of profiled aluminium sheet and self-adhesive butyl tape. Special perforations ensure proper air circulation and effective ventilation of moisture accumulated in the thermal insulation and beneath the roofing.

PARAMETER	UNIT	VALUE
Material		Aluminium, butyl
Aluminium	[mm]	Width: 300; 400 Thickness: ca. 0,14
Butyl tape		
- Size:	[mm]	15 x 1,5
- Color:		Black with liner
- Peel resistance:	[N/cm]	>19
- Density:	[g/cm <sup>3</sup> ]	1,48
- Solvents:		Does not contain
- Solvents:		Suitable also for warm and humid conditions
Width	[mm]	300; 400
Length	[mb]	5
Application temperature	[°C]	from 5 to 40
Storage temperature	[°C]	from 5 to 25
Shelf life	[month]	to 12
Color	[RAL]	Terracotta 8004; brown 8019; brown 8017; black 9005; anthracite 7021; chestnut 8015; cherry 3011
Cardboard	[pcs.]	300 mm - 5 400 mm - 4
Pallet	[pcs.]	300 mm - 180; 400 mm - 100

Label code ROLL METAL NEW



## Eurovent **ROLL METAL NEW**

**Application:** It is used as a ventilation and sealing element on horizontal and sloped ridges. It protects the roof surface against wind-driven snow, rain, moisture, dust, and debris entering from the ridge area. Suitable for use with almost all types of roofing materials – ceramic tiles, concrete tiles, metal roof tiles, trapezoidal sheets, profiled aluminium sheets, etc.

**Installation recommendations:** Store the tape at room temperature (between 5 °C and 25 °C) for approximately 24 hours before application. The application temperature should be above 5 °C (recommended above 10 °C). The surface to which the tape is applied must be dry and free of dust and grease. The tape should be laid on the ridge batten, underneath the ridge tile. Before installation, clean and dry the surface thoroughly. Shape the pleated edges of the tape according to the profile of the roofing material. Remove the protective liner from the butyl and press the tape firmly onto the roof surface to create a tight seal.

**Safety:** The product is not intended for consumption. Avoid contact with eyes. In case of skin irritation, consult a doctor.

**Storage / transport:** The product should be stored in dry, covered areas, free from moisture and direct UV exposure. Under excessive weight, the product may become deformed or damaged, including the galvanized and painted surfaces. Therefore, stacking with other heavy items is not recommended during transport or storage. Transport should be carried out using covered vehicles, with the product secured against damage. All applicable transport safety regulations must be observed. The product must be protected from exposure to chemicals, especially solvent-based substances, as these may reduce its technical performance or cause permanent damage.

The product is covered by a warranty provided that all guidelines specified in the technical data sheet are strictly followed. The manufacturer reserves the right to reject any claims resulting from failure to comply with these instructions.

*Contained information, advice and guidance is given based on our knowledge, researches, experience and in good faith. We are not responsible for the consequences of improper or incorrect use of our products. Each user of this material will ensure in every possible way, including an examination of the final product in the relevant conditions, the suitability of supplied materials to achieve the objectives pursued by him.*

Product information can be found on the website: [www.eurovent.de](http://www.eurovent.de)

Update date: 26/01/2026