


TECHNICAL DATA SHEET

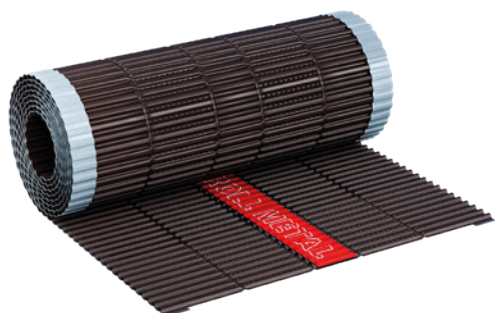

Eurovent ROLL METAL

Single-layer ventilation tape for horizontal and sloped ridges. Made of profiled aluminium sheet and self-adhesive butyl tape. Special perforations ensure proper air circulation and ventilation of moisture accumulated in the thermal insulation and under the roofing.

PARAMETER	UNIT	VALUE
Material		Aluminium, butyl
Aluminium	[mm]	Width: 300; 400 Thickness: ca. 0,14
Butyl tape		
- Size:	[mm]	15 x 1,5
- Color:		Black with liner
- Peel resistance:	[N/cm]	>19
- Density:	[g/cm ³]	1,48
- Solvents:		Does not contain
- Solvents:		Suitable also for warm and humid conditions
Width	[mm]	300; 400
Length	[mb]	5
Application temperature	[°C]	from 5 to 40
Storage temperature	[°C]	from 5 to 25
Shelf life	[month]	to 12
Color	[RAL]	Brick red RAL 8004; brown RAL 8019; brown RAL 8017; black RAL 9005; anthracite RAL 7021; chestnut RAL 8015; cherry RAL 3011;
Cardboard	[pcs]	300 mm - 5 400 mm - 4
Pallet	[pcs.]	300 mm - 180; 400 mm - 100



Eurovent **ROLL METAL**

Application: Used as a ventilation and sealing component for horizontal and sloped ridges. It protects the roof surface against wind-driven snow, rain, moisture, dust, and debris entering from the ridge area. Suitable for use with nearly all types of roofing materials – ceramic and concrete roof tiles, metal roof tiles, trapezoidal sheets, profiled aluminium sheets, and more.

Assembly: For approximately 24 hours prior to application, the tape should be stored at room temperature (between 5 °C and 25 °C). During application, the temperature should be above 5 °C (ideally above 10 °C). The surface to which the tape is applied must be dry and free from dust and grease. The tape is installed on the ridge batten, underneath the ridge tiles. Before installation, the surface must be properly cleaned and dried. The pleated sides of the tape should be shaped to match the contour of the roofing. Remove the protective liner from the butyl adhesive and press the tape firmly onto the roof surface to ensure a tight and secure bond.

Safety: The product is not intended for consumption. Avoid contact with eyes. In case of skin irritation, consult a doctor.

Storage / transport: The product must be stored in dry, covered areas, free from moisture and direct UV radiation. Exposure to excessive weight may cause deformation, distortion, and damage to the zinc or lacquer coating. Therefore, stacking the product with other heavy items—both during transport and storage—is not recommended. Covered means of transport are advised, with proper protection against mechanical damage. During transport, all applicable safety regulations must be observed. The product should be protected from chemical agents, especially solvent-based substances, as these may reduce its technical performance or cause permanent damage.

The product is covered by a warranty, provided that all guidelines outlined in the technical data sheet are strictly followed. The manufacturer reserves the right to reject warranty claims if the product is used contrary to these instructions.

Contained information, advice and guidance is given based on our knowledge, researches, experience and in good faith. We are not responsible for the consequences of improper or incorrect use of our products. Each user of this material will ensure in every possible way, including an examination of the final product in the relevant conditions, the suitability of supplied materials to achieve the objectives pursued by him.

Product information can be found on the website: www.eurovent.de

Update date: 16/07/2025