


## TECHNICAL DATA SHEET

### Eurovent **ROLL SUPER**

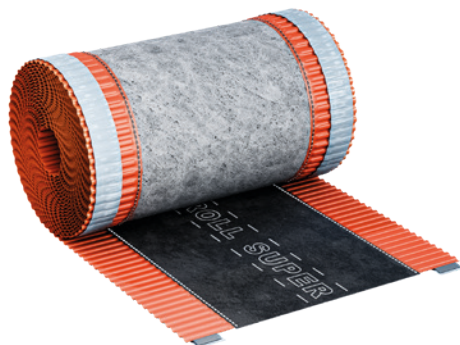

Two-layer ventilation tape for horizontal and sloped ridges. Made of profiled aluminium sheet, polypropylene nonwoven reinforced with a layer of polypropylene geotextile, and self-adhesive butyl tape. The connection between the aluminium and the polypropylene fabric is additionally reinforced with special stitching using dedicated thread.

PARAMETER	UNIT	VALUE
Material		Aluminium, polypropylene nonwoven, PP geotextile, butyl
Roll width	[mm]	240; 310; 390
Roll length	[mb]	5
Aluminium	[mm]	Width: 50; 70 Thickness: 0,12
PP nonwoven		
- Width	[mm]	200
- Components		Polypropylene nonwoven reinforced with a layer of geotextile.
- Average air permeability		189 cm <sup>3</sup> /cm <sup>2</sup> /s ± 9
Butyl tape:		
- Size:	[mm]	15 x 1,5
- Color:		black
- Adhesion:	[N/cm]	>19
- Density:	[g/cm <sup>3</sup> ]	1,48
- 50% Compression:	[kN/m <sup>2</sup> ]	100
Color	[RAL]	Brick red RAL 8004; brown RAL 8019; brown RAL 8017; black RAL 9005; anthracite RAL 7021; chestnut RAL 8015; cherry red RAL 3011;
Storage temperature	[°C]	from 5 to 25
Shelf life	[month]	to 12
Cardboard	[pcs.]	240 mm, 310 mm - 5 390 mm - 4
Pallet	[pcs.]	240 mm - 210; 310 mm - 180; 390 - 100



## TECHNICAL DATA SHEET

### Eurovent **ROLL SUPER**

**Application:** Used as a ventilation and sealing element for horizontal and sloped ridges. It protects the roof surface against wind-driven snow, rain, moisture, dust, and debris entering from the ridge area, while also ensuring ventilation from the thermal insulation side. Thanks to the tape's variable width range from 240 to 390 mm, it is suitable for use with most types of roofing materials – ceramic and concrete tiles, metal roof tiles, trapezoidal sheets, profiled aluminium sheets, and more.

**Assembly:** Store the tape at room temperature (between 5 °C and 25 °C) for approximately 24 hours before application. During installation, the temperature should be above 5 °C (recommended above 10 °C). The surface to which the tape is applied must be dry and free from dust and grease. Lay the tape along the ridge batten, underneath the ridge tile. Before installation, clean and dry the surface thoroughly. Shape the pleated edges to match the profile of the roofing. Remove the protective liner from the butyl adhesive and press the tape firmly onto the roof surface to create a tight, secure seal.

**Safety:** The product is not intended for consumption. Avoid contact with eyes. In case of skin irritation, consult a doctor.

**Storage / transport:** The product should be stored at room temperature in dry, covered areas, free from moisture and direct UV radiation. As it is partially made of flexible aluminium sheet, it is recommended to keep it in its original, sealed packaging. Protect from mechanical damage. The product must be transported using covered means of transport and secured against damage. It should be protected from exposure to chemical agents, especially solvent-based substances, as these may reduce its technical properties or cause permanent damage.

The product is covered by a warranty provided that all guidelines specified in the technical data sheet are strictly followed. The manufacturer reserves the right to reject warranty claims in case of non-compliance with the stated instructions.

*Contained information, advice and guidance is given based on our knowledge, researches, experience and in good faith. We are not responsible for the consequences of improper or incorrect use of our products. Each user of this material will ensure in every possible way, including an examination of the final product in the relevant conditions, the suitability of supplied materials to achieve the objectives pursued by him.*

Product information can be found on the website: [www.eurovent.de](http://www.eurovent.de)

Update date: 16/07/2025