


TECHNICAL DATA SHEET

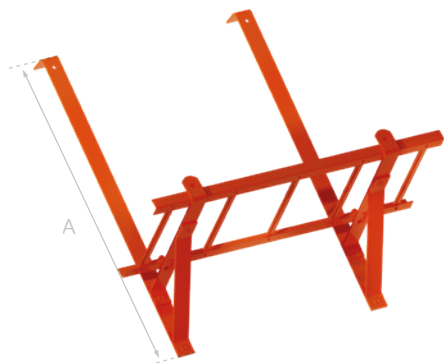

Eurovent **SNOWSTOPPER SET BIBER**

Snow protection system supplied as a complete installation set consisting of the Eurovent® SNOWSTOPPER snow fence, Eurovent® FIX BIBER brackets and Eurovent® CLIP connectors. The components are made of galvanized steel and provide effective protection against the sliding of large amounts of snow from the roof slope. The set is available in a galvanized version and in several colour variants, powder-coated according to the RAL colour system.

PARAMETER	UNIT	VALUE
Material composition		Steel grade S235JR
Type of roofing		For plain tiles (beaver-tail tiles)
Bracket length	[mm]	A: 580
Snow fence dimensions	[m]	1,0; 2,0; 3,0;
Paint coating thickness	[µm]	≥ 60
Corrosion protection		Hot-dip galvanization
Zinc coating thickness	[µm]	≥ 55
Colour	[RAL]	graphite 7024, brick red 8004, brown 8017, brown 8019, anthracite 7016, black 9005, chestnut 3009, cherry red 3004
Packaging	[pcs.]	- SNOWSTOPPER SET 1,0 m: 1 SNOW-STOPPER 1,0 m + 2 FIX BIBER - SNOWSTOPPER SET 2,0 m: 2 SNOW-STOPPER 1,0 m + 4 FIX BIBER + 2 CLIP - SNOWSTOPPER SET 3,0 m: 3 SNOW-STOPPER 1,0 m + 6 FIX BIBER + 4 CLIP



Eurovent **SNOWSTOPPER SET BIBER**

Application: It is used as a snow protection element preventing the sliding of large amounts of snow from roof slopes covered with plain tiles (beaver-tail tiles). The set can be used on pitched roofs with a slope from 10° to 90°. The set is packed in a carton containing all installation components, which significantly reduces installation time and eliminates potential mistakes when assembling the set. For lengths of 2.0 m and 3.0 m, individual elements are connected using special Eurovent[®] CLIP connectors included in the sets.

Safety: The product is not intended for consumption. Avoid contact with eyes. In the event of skin irritation, consult a physician.

Storage / transport: The set should be stored at room temperature, in original packaging, in dry, covered rooms free from moisture. The components of the set may become bent, deformed or damaged to the zinc and paint coating under heavy load. Therefore, it is recommended not to stack the product with other heavy items, both during transport and storage. The set should be transported using covered means of transport, protected against damage. During transport, transport safety regulations must be observed. The product must be protected against the effects of chemical agents that could reduce its technical parameters or cause permanent damage.

The product is covered by a warranty provided that the guidelines contained in the technical data sheet are strictly followed. The manufacturer reserves the right to refuse warranty claims in the event of failure to comply with the specified guidelines.

Contained information, advice and guidance is given based on our knowledge, researches, experience and in good faith. We are not responsible for the consequences of improper or incorrect use of our products. Each user of this material will ensure in every possible way, including an examination of the final product in the relevant conditions, the suitability of supplied materials to achieve the objectives pursued by him.

Product information can be found on the website: www.eurovent.de

Update date: 02/02/2026