


TECHNICAL DATA SHEET

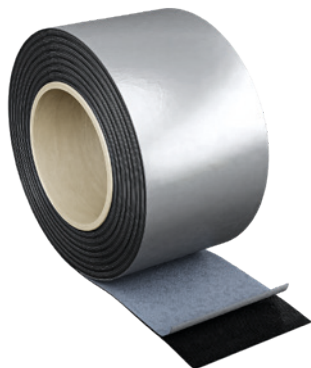

Eurovent **FIXBIT**

Bituminous roofing tape coated with aluminium foil. Available in several colour variants. Made from solvent-free bitumen, the tape features an aluminium layer and a silicone release liner.

PARAMETER	UNIT	VALUE
Material		Bitumen adhesive and aluminium foil
Width	[mm]	100; 150; 300
Length	[mb]	10
Thickness	[mm]	1,0 ± 0,2
Tensile strenght	[N/50mm]	> 200
Fire resistance	[class]	E
Vapour-permeability	[m]	> 1500
Tear resistance	[N]	20 - 40
Application temperature	[°C]	+5 do +45
Temperature Resistance	[°C]	-30 do 80
UV resistance		Resistant
Color	[RAL]	brick; bronze; aluminium; anthracite
Temperatura przechowywania	[°C]	from 1 to 25
Shelf life	[months]	to 12
Cardboard	[pcs.]	50 mm - 6; 75 mm - 4; 100 mm - 3; 150 mm - 2; 200 mm - 1; 300 mm - 1;
Pallet	[pcs.]	50 mm: 576; 75 mm: 384; 100 mm: 288; 150 mm: 192; 200 mm: 96; 300 mm: 96;



TECHNICAL DATA SHEET

Eurovent **FIXBIT**

Application: It is used for bonding and sealing roofing flashings around chimneys, roof windows, parapet walls, skylights, roof valleys, and ventilation elements on both flat and pitched roofs. It provides excellent adhesion between various metal components and materials such as plastics, concrete, and brick. Widely used for chimney flashings and other roof protrusions, it ensures durable and flexible sealing in demanding roof applications. Before application, make sure all surfaces are clean, dry, and free from dust, grease, or other contaminants. If there is any doubt regarding the substrate quality, a bonding test should be carried out. Eurovent[®] FIXBIT tape is resistant to ageing, weather conditions, temperature variations, and UV radiation.

Assembly:

The application area must be structurally sound, dry, and free from dust and grease. Before bonding, surfaces should be thoroughly cleaned and adhesion tests performed. Finished joints should not be exposed to standing water or constant mechanical load. Wrinkles and tension in the tape must be smoothed out.

Other recommendations:

Immediately after completing the work, the tape should be cut and rolled up, as the bitumen layer may harden after a few hours. Avoid prolonged direct contact with skin.

Safety: The product is not intended for consumption. Avoid contact with eyes. In case of skin irritation, consult a doctor.

Storage / transport: The product must be stored in its original packaging, in dry, covered areas, protected from moisture and direct UV radiation. It should be transported using covered vehicles and secured against damage. The product must be protected from exposure to chemicals, especially solvent-based substances, as these may impair its technical properties or cause permanent damage.

The product is covered by a warranty, provided that all guidelines specified in the technical data sheet are strictly followed. The manufacturer reserves the right to reject warranty claims if these guidelines are not observed.

Contained information, advice and guidance is given based on our knowledge, researches, experience and in good faith. We are not responsible for the consequences of improper or incorrect use of our products. Each user of this material will ensure in every possible way, including an examination of the final product in the relevant conditions, the suitability of supplied materials to achieve the objectives pursued by him.

Product information can be found on the website: www.eurovent.de

Update date: 04/02/2026